





Tersus GeoBee

Cost-effective Solution for Ntrip Corrections



Tersus GeoBee

Cost-effective Solution for Ntrip Corrections




David GNSS Receiver

The Tersus GeoBee is a dedicated and cost-effective solution to transmit or receive Ntrip corrections. With Tersus Ntrip Caster Service, Ntrip Modem and David Receiver, the GeoBee opens the possibility for users to transmit Real Time Kinematic (RTK) corrections via Internet (Ethernet or 2G/3G/4G) in a simple, user-friendly way, just using a SIM card or Ethernet cable without any need of a static IP. GeoBee can also work as GNSS Rover to receive RTK corrections from Tersus Ntrip Caster or any CORS service.

Ntrip server mode: use David GNSS receiver to create a base station. This temporary base or CORS is for surveying, agriculture, UAV, machine control, and etc. It is also ideal for deformation monitoring. Tersus GNSS Inc. provides Ntrip Caster to transfer data.


Ntrip client mode: connect David or other Tersus GNSS receivers to Tersus Ntrip Caster or any Ntrip/CORS service. David is mainly used for surveying, and also used as a GNSS sensor in various applications, such as mobile mapping, UAV, machine control, agriculture, and etc.

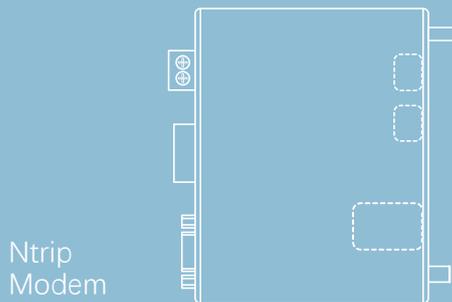

Ntrip Modem

Features

- Supports multiple constellations & frequencies
 - GPS L1/L2
 - GLONASS L1/L2
 - BeiDou B1/B2
- Support 384 channels
- Supports RTCM2.3/3.x, CMR, CMR+ corrections
- Supports 4GB internal storage
- Rapid RTK integer ambiguity resolution
- Supports stable, high-precision measurement output
- Supports Ethernet is default while 2G/3G/4G is hot standby
- Supports remote access and operation

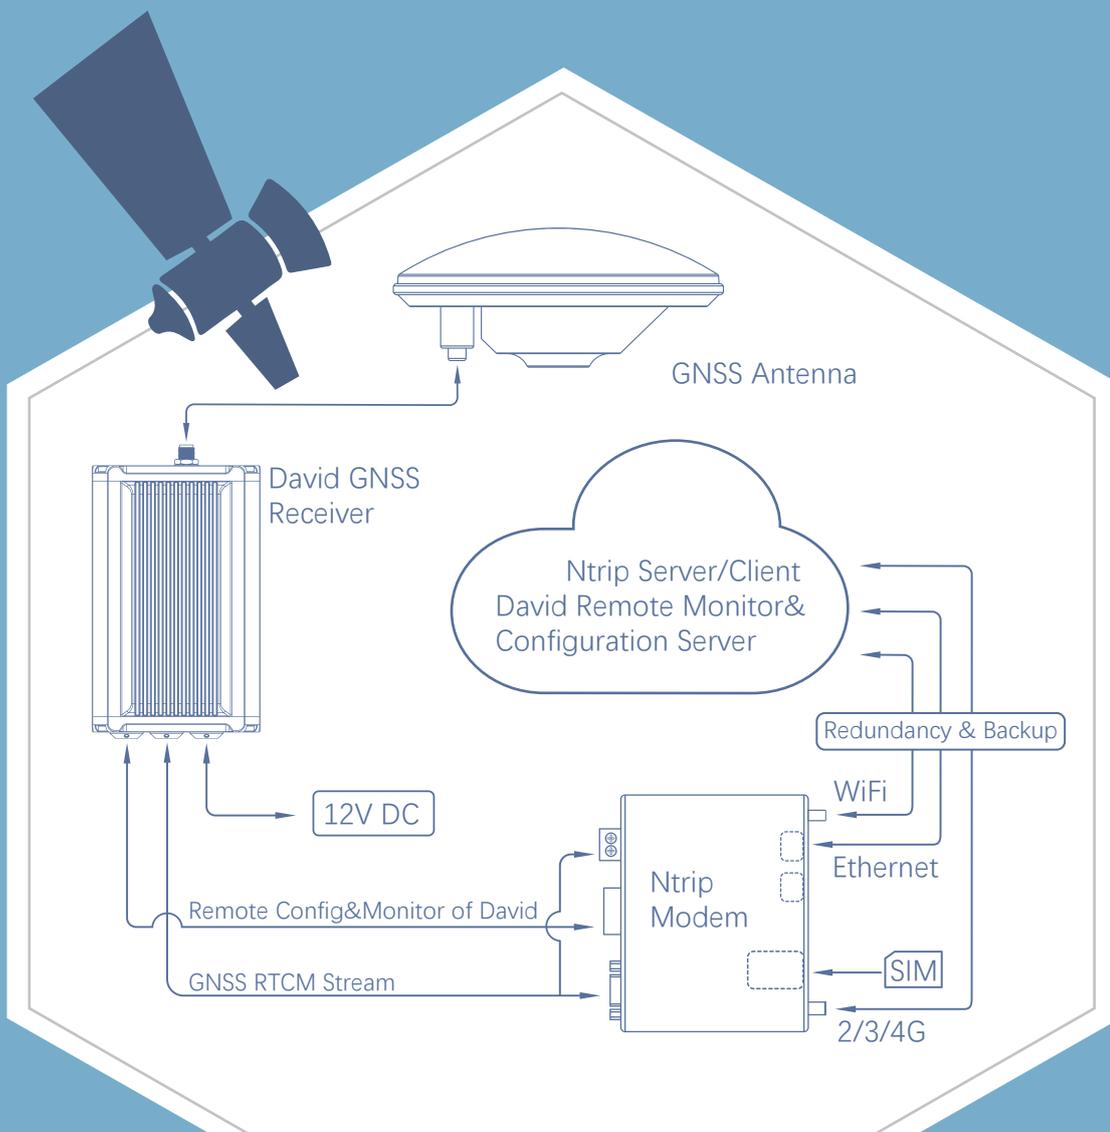

Tersus GeoBee

Technical Specifications - David

Signal Tracking

GNSS	GPS L1/L2 GLONASS L1/L2 BeiDou B1/B2
------	--

GNSS Channels	384
---------------	-----

Positioning

Single Point Positioning Accuracy (RMS)		
	Horizontal	1.5m
	Vertical	3.0m

Real Time Kinematic (RMS)		
	Horizontal	10mm+1ppm
	Vertical	15mm+1ppm

Post Processed Kinematic (RMS)		
	Horizontal	10mm+1ppm
	Vertical	15mm+1ppm

Static Post Processing (RMS)		
	Horizontal	3mm + 0.5ppm
	Vertical	5mm + 0.5ppm

Observation (zenith direction)

C/A Code	10cm
P Code	10cm
Carrier Phase	1mm

Performance

Time to First Fix		
	Cold Start	<50s
	Warm Start	<30s

Timing Accuracy (RMS)	20ns
-----------------------	------

Velocity Accuracy (RMS)	0.03m/s
-------------------------	---------

Initialization (typical)	<10s
Initialization Reliability	>99.9%

Electrical

Input Voltage	5V ~ 12V DC
Power Consumption	4.9W(David only)

Data

Storage	4GB in-built Memory
Correction	RTCM2.3/3.x, CMR, CMR+
Max. Update Rate	20Hz

Communication

Serial Ports	RS-232 x 2
USB Ports	USB 2.0 device x1
Antenna Connector	SMA female x1
Active Antenna Input Impedance	50Ω
COM Baud Rate	Up to 460800bps

Physical

Dimension	104x65x31mm (David only)
Weight	≈250g (David only)
Operating Temperature	-40°C ~ + 85°C
Dust & Waterproof	IP67

Optional Accessory

Radio	2W 460MHz 30W 460MHz
Battery	Battery bank

Software Support

Tersus Nuwa
MicroSurvey FieldGenius
Other Third Party Software Support NMEA-0183



Tersus GeoBee

Technical Specifications - Ntrip Modem TR600

Performance

Input Voltage	12V ~ 48V DC
Operating Current	350mA @ +12V DC
Standby Current	250mA @ +12V DC
Power Consumption (typical)	4.2W

Physical

Dimension	118x91x34mm (w/o connectors)
Weight	335g
Operating Temperature	-30°C ~ +80°C
Relative Humidity	95% @ +40°C

Interfaces

Serial Port	RS232 x1, RS485 x1
Ethernet	RJ45 x2 (LAN, LAN/WAN)
Antenna Connector	SMA Female x2 (4G, WiFi)

Communication (Network)

Chinese version:		
2G	GSM/GPRS/EDGE/CDMA2000 1x	
3G	UMTS/WCDMA/HSPA/HSPA+	
	TD-SCDMA/CDMA2000 EVDO	
4G	TDD-LTE/FDD-LTE	
Eurasian version (Europe, Middle East, Africa, South Korea, Thailand):		
2G	GSM/GPRS/EDGE	
3G	UMTS/WCDMA/HSPA/HSPA+	
4G	TDD-LTE/FDD-LTE	
North American version:		
3G	UMTS/WCDMA/HSPA/HSPA+	
4G	FDD-LTE	
Australian version (New Zealand, Australia, South America):		
2G	GSM	
3G	WCDMA	
4G	FDD-LTE/TDD-LTE	

Communication (Operating Frequency)

Chinese version	
	TDD-LTE B38/B39/B40/B41
	FDD-LTE B1/B3/B8
	UMTS/HSPA/HSPA+ B1/B8
	TD-SCDMA B34/B39
	CDMA2000 1x/EVDO BCO
	GSM/GPRS/EDGE 900/1800 MHz
Eurasian version	
	TDD-LTE B38/B40
	FDD-LTE B1/B3/B7/B8/B20
	UMTS/HSPA/HSPA+ B1/B8
	GSM/GPRS/EDGE 900/1800 MHz
North American version	
	FDD-LTE B2/B4/B5/B17
	UMTS/HSPA/HSPA+ B2/B5
Australian version	
	FDD-LTE B1/B2/B3/B4/B5/B7/B8/B28
	TDD-LTE B40
	WCDMA B1/B2/B5/B8
	GSM 850/900/1800/1900




Tersus GNSS Inc.

Global Accuracy Easier

Tersus is a leading GNSS RTK solution provider. Our engineers have been pioneers in the design of GNSS products to support high-precision positioning applications.

Our products include GNSS RTK & PPK OEM boards and receivers, as well as integrated solutions such as the David GNSS Receiver, Oscar GNSS Receiver, MatrixRTK, and GNSS-aided Inertial Navigation System.

Designed for easy and rapid integration, our GNSS solutions offer centimeter-level positioning accuracy and flexible interfaces for a variety of applications including: unmanned aerial vehicle (UAVs), surveying, mapping, construction engineering, and precision agriculture.

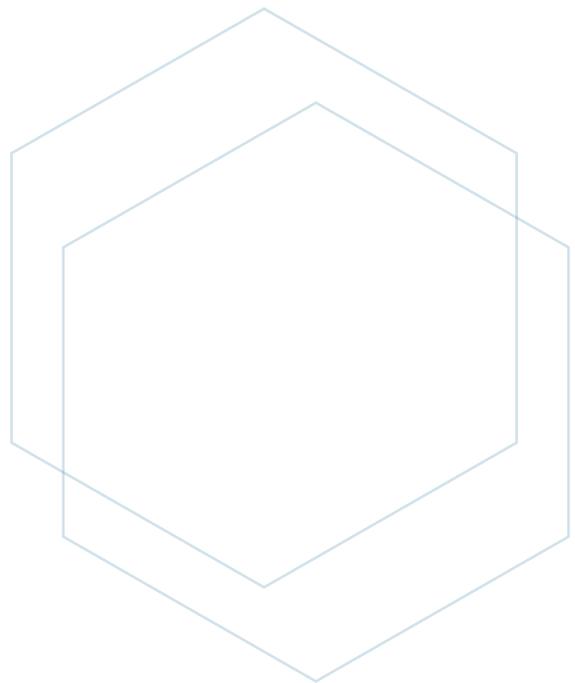

Authorized Master
Distributor in U.S. & Canada

Website:
geospatial.desertcreativegroup.com

Sales Inquiry:
sales@desertcreativegroup.com

Technical Support:
+1 (208) 423-7422



Information is subject to change without notice.
© Copyright 2023 Tersus GNSS Inc.